




Luz indicadora bulbo / led Ø55  
fija / intermitente de 1 a 5 módulos de luz

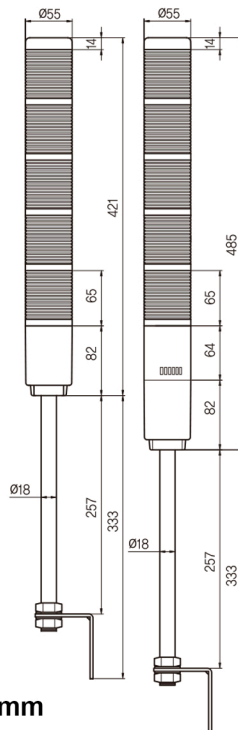

Unidad: mm

## HY-TLN241

① ② ③ ④

①	<b>Serie HY</b>	
②	<b>Función</b>	
	<b>TN</b>	Bulbo Luz Continua
	<b>TWN</b>	Bulbo Luz Continua / Luz Intermitente
	<b>TBN</b>	Bulbo Luz Continua / Alarma
	<b>TWBN</b>	Bulbo Luz Continua / Luz Intermitente / Alarma
	<b>TLN</b>	Led Luz Continua
	<b>TWLN</b>	Led Luz Continua / Luz Intermitente
	<b>TBLN</b>	Led Luz Continua / Alarma
	<b>TWBLN</b>	Led Luz Continua / Luz Intermitente / Alarma
③	<b>Voltaje</b>	
	<b>12</b>	12 VCD
	<b>24</b>	24 VCD
	<b>110</b>	110 VCA
	<b>220</b>	220 VCA
④	<b>Módulos de Luz</b>	
	<b>1</b>	1 (Rojo)
	<b>2</b>	2 (Rojo, Verde)
	<b>3</b>	3 (Rojo, Amarillo, Verde)
	<b>4</b>	4 (Rojo, Amarillo, Verde, Azul)
	<b>5</b>	5 (Rojo, Amarillo, Verde, Azul, Claro)

## ESPECIFICACIONES TÉCNICAS

**Voltaje** 12-24 VCD  
110-220 VCA

**AMP** 0.42(12V) / 0.21(24V)  
0.07(110V) / 0.04(220V)

**DB** 80 a 1m

**FPM** 60

**Foco Bulbo** 5 Watts

**Color**

**IK** 06

**Usos**



**06** Energía (J) 1  
Masa y altura de la pieza de golpeo 0.5 Kg  
400mm